

Breakers

Ordering designation	Item no.
TE 1000-AVR breaker	248734

Equipped with 4-meter supply cord, AVR active vibration reduction, Hilti grease, dust shield, cleaning cloth, operating instructions. Packed in a durable impact-resistant plastic Hilti toolbox.


TE-SP polygon chisels

Polygon pointed chisels, overall lengths 360, 500 and 700 mm
Polygon flat chisels, overall lengths 360, 500 and 700 mm, cutting edge width 32 mm
Polygon wide flat chisels, overall lengths 360 and 500 mm, cutting edge widths 50, 80 and 120 mm



AVR active vibration reduction

Internal parts including the hammering mechanism and motor are completely isolated from the outer casing and grips by a system of AVR springs and pivots. This results in best-in-class vibration values and thus top productivity.

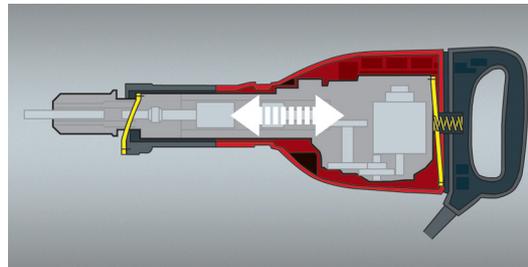

SR motor

The electronically controlled SR motor has no rotor windings, no commutator and no carbon brushes. Its advantages are obvious: no need to replace brushes, longer service intervals and much longer lifetime. It also provides constantly high performance even if the supply voltage drops, e.g. when a long extension cord is used.

Performance data

	TE 1000-AVR	TE 805
Rated power (W)	1600	1350
Hammering speed under load (blows/min.)	1950	2000
Single impact energy, full power (J)	22	17
Single impact energy, reduced power (J)	16	–
Triaxial vibration, chiseling (m/s ²)	6.5	15
Dimensions, L×W×H (mm)	700×138×230	600×120×230
Weight of the tool as per EPTA 01/2003 (kg)	11.8	10.3

Right of technical changes reserved.



Best-in-class performance and exceptionally low vibration make the TE 1000-AVR a pleasure to use at floor level.

Productivity plus



High-performance breakers with AVR for powerful, comfortable demolition



Rugged cordless reciprocating saws for cutting materials of virtually all kinds



Powerful combihammers for tough drilling and chiseling jobs



Extremely compact laser range meters for quick and reliable distance measurement

HILTI

1 Year

LIFETIME SERVICE

NO COSTS

Lifetime

Lifetime

REPAIR COST LIMIT

MANUFACTURERS WARRANTY

Hilti. Outperform. Outlast.

Hilti (Malaysia) Sdn. Bhd. (157721-A)

Head Office: 9 & 11, Jalan PJS 11/20, Bandar Sunway, 46150 Petaling Jaya, Selangor DE., Malaysia.

Toll Free: 1-800-88-0985 | www.hilti.com.my